

ReechCraft™ **PowerLiFT**™

Go Where Others Can't

EXTREMELY PORTABLE • MANY SET-UP OPTIONS • COMPACT STORAGE

PL65 with FIXED BASE

Small footprint



PL65 with OUTRIGGER BASE

Quick & easy set-up



PL65 with STRADDLE BASE

Work over any obstacle






Finally, there is a practical 3-in-1 lift that makes reaching difficult places easy in schools, churches, auditoriums, theaters, offices and more.

POWERLIFT PL65 PRODUCT DETAILS:

- 360° turning radius
- Extremely portable
- Complies with safety standards
- Fully enclosed personnel basket
- Emergency lowering system
- Unlimited possibilities

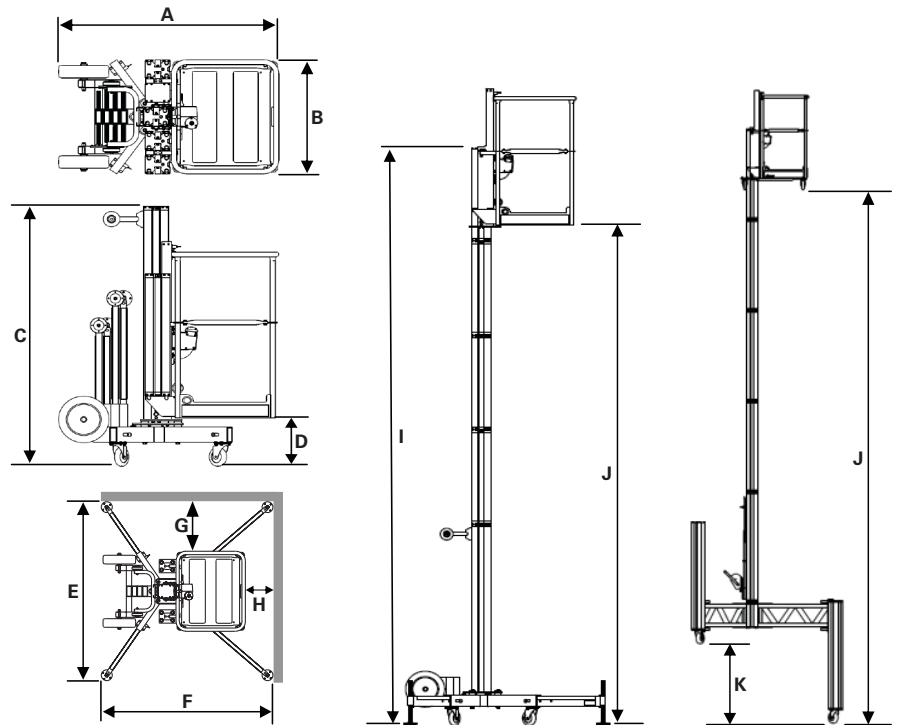

DESCRIPTION	FIXED BASE	OUTRIGGER BASE	STRADDLE BASE	STRADDLE BASE EXTENSIONS
Conforming Standard	ANSI A92.3	ANSI A92.3	ANSI A92.3	ANSI A92.3
Platform Capacity	350 lbs (159 kg)	350 lbs (159 kg)	350 lbs (159 kg)	350 lbs (159 kg)
Power Source	AC or DC Drill	AC or DC Drill	AC or DC Drill	AC or DC Drill
Rated Horizontal Force	52.5 lbs (234 N)	52.5 lbs (234 N)	52.5 lbs (234 N)	52.5 lbs (234 N)
Machine Weight	220 lbs (100 kg)	310 lbs (141 kg)	475 lbs (216 kg)	500 lbs (227 kg)
Swivel/Lockable Caster Diameter	5 in. (127 mm)	5 in. (127 mm)	6 in. (152 mm)	6 in. (152 mm)
Platform Size (L x W)	26 in. x 30 in. (660 mm x 762 mm)	26 in. x 30 in. (660 mm x 762 mm)	26 in. x 30 in. (660 mm x 762 mm)	26 in. x 30 in. (660 mm x 762 mm)
Mast Section Weight	28.5 lbs (12.9 kg)	28.5 lbs (12.9 kg)	28.5 lbs (12.9 kg)	28.5 lbs (12.9 kg)
Rear Outrigger Weight	9.3 lbs (4.2 kg)	9.3 lbs (4.2 kg)	9.3 lbs (4.2 kg)	9.3 lbs (4.2 kg)
Front Outrigger Weight	10.6 lbs (4.8 kg)	10.6 lbs (4.8 kg)	10.6 lbs (4.8 kg)	10.6 lbs (4.8 kg)
Flat Free Transport Wheels	12 in. x 3.5 in. (305 mm x 89 mm)	12 in. x 3.5 in. (305 mm x 89 mm)	12 in. x 3.5 in. (305 mm x 89 mm)	12 in. x 3.5 in. (305 mm x 89 mm)
Drive	Drive Worm Drive with Integrated Drive Gear & Brake	Drive Worm Drive with Integrated Drive Gear & Brake	Drive Worm Drive with Integrated Drive Gear & Brake	Drive Worm Drive with Integrated Drive Gear & Brake
A Stowed Length	36.0 in. (914 mm)	53.4 in. (1356 mm)	36.0 in. (914 mm)	36.0 in. (914 mm)
B Stowed Width	30 in. (762 mm)	30 in. (762 mm)	30 in. (762 mm)	30 in. (762 mm)
C Stowed Height	60.0 in (1524 mm)	68.5 in. (1741 mm)	60.0 in (1524 mm)	60.0 in (1524 mm)
D Minimum Platform Height	6 in. (152 mm)	12.9 in. (329 mm)	22 in. (559 mm)	22 in. (559 mm)
E Outrigger Footprint Width	N/A	67.1 in. (1705 mm)	75 - 91.5 in. (1905 - 2324 mm)	75 - 91.5 in. (1905 - 2324 mm)
F Outrigger Footprint Length	N/A	64.4 in. (1635 mm)	72 - 90 in. (1829 - 2286 mm)	72 - 90 in. (1829 - 2286 mm)
G Distance from Wall Side	0 in. (0 mm)	18.5 in. (471 mm)	22.5 - 30.5 in. (572 - 775 mm)	22.5 - 30.5 in. (572 - 775 mm)
H Distance from Wall Front	0 in. (0 mm)	10.3 in. (261 mm)	14.2 - 21.4 in. (361 - 544 mm)	14.2 - 21.4 in. (361 - 544 mm)
I Erected Mast Height	20.7 ft (6.31 m)	21.7 ft (6.60 m)	26.2 in (7.98 m)	26.2 in (7.98 m)
J Maximum Platform Height	18.5 ft (5.64 m)**	19.5 ft (5.94 m)	24.0 ft (7.32 m)	24.0 (7.32 m)
K Maximum Leg Offset	N/A	N/A	42 in. (1067 mm)	66 in. (1676 mm)
Maximum Working Height	25 ft (7.64 m)**	25.5 ft (7.77 m)*	30.6 ft (9.32 m)*	30.6 ft (9.32 m)*

*Based on 2m above platform height. **Call ReechCraft for additional height options.